



bar

MPM416W Submersible Level Transmitter

MPM416W Submersible Level Transmitters use high performance piezoresistive pressure sensor as sensing elements. It measures liquid static pressure accurately which is positive proportional to liquid depth, transmitting pressure signal into standard current/ voltage output signal by amplifier circuit board. The product has high accuracy, compact size and easy operation characteristics, and it can be submersible into the liquid to measure level from transmitter bottom to liquid surface. It is widely used for the liquid measure and control of both petroleum, chemi-industry, power station, city water supply and drainage and hydrology.




MICROSENSOR

AUTHORIZED DISTRIBUTOR

FEATURES

- Separate construction; full sealed stainless steel construction for submersible/inserted sensor; aluminum alloy electric connection box; easy for installation, wiring and calibration;
- Explosion-proof version product conforms to Exia II CT6 of Standard GB3836.4; Explosion-proof Certificate is issued
- Ship-use product conforms to CCS Rules of Classification of Sea-going Steel Ships(2006); Ship-use Product Certificate is issued;
- CE Certificate

LOAD CHARACTERISTIC

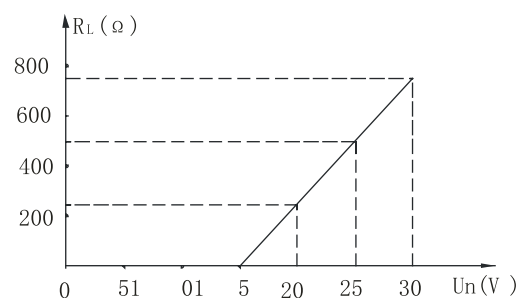

2-wire

4mA ~20mA DC output

15V ~30V DC power supply

$$R_L \leq \frac{U_n - 15V}{20mA} \times 10^3 (\Omega)$$




SPECIFICATION


Pressure range	1, 2, 5, 10, 20, 50, 100, 200mH ₂ O		
Overpressure	1.5times FS		
Accuracy	±0.25%FS (typ.)	±0.5%FS (max.)	
Stability error	±0.1%FS (typ.)	±0.2%FS (max.)	pressure range >10mH ₂ O
	±10mmH ₂ O (typ.)	±20mmH ₂ O (max.)	pressure range ≤10mH ₂ O
Temp. drift	Zero drift, ±%FS/°C		
	Range >10mH ₂ O	0.005(typ.)	0.01 (max.)
	Range ≤10mH ₂ O	0.01 (typ.)	0.02(max.)
	Range ≤5mH ₂ O	0.015 (typ.)	0.03(max.)
Temp. drift	Range ≤2mH ₂ O	0.025 (typ.)	0.05(max.)
	Sensitivitydrift, ±%FS/°C		0.02(max.)
Transmitting	2-wire		3-wire
Power supply	15~28VDC (Intrinsic safe version is supplied through safe barrier)		
Output signal	4~20mADC		0~10/20mADC
Load (Ω)	< (U-15) / 0.02A		>5k
Material contacting with media	Housing: stainless steel 1Cr18Ni9Ti		O-ring: Viton
	Diaphragm: stainless steel 316L		Rubber casing: NBR
	Cable: Φ7.2mm PVC/Polyurethane cable with vented tube		
Operation temp.	-30°C ~80°C -10°C ~70°C -10°C ~60°C		
Storage temp.	-40°C ~120 °C -20°C ~85°C		
Protection	IP68 (sensor part), IP65 (wiring part)		
Ex-proof class	Exia II CT6		

OUTLINE CONSTRUCTION (Unit: mm)

Outline dimension

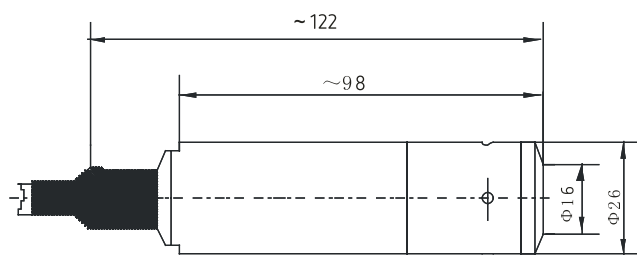


Outline and Installation Dimension of Electric Housing

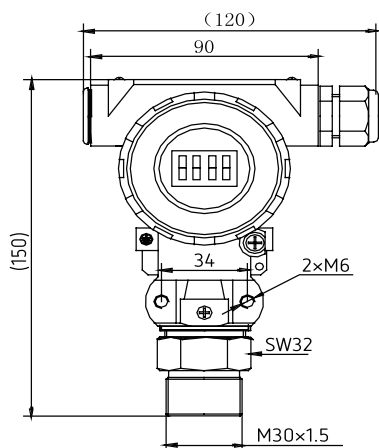

ELECTRICAL CONNECTION


Terminal connection in Electrical Housing

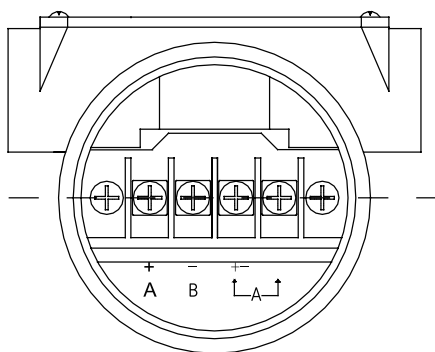


Current		Voltage	
Terminal	Definition	Terminal	Definition
+ / A	V+	+ / A	V+
- / B	I0	- / B	OUT
		A	GND




APPLICATION EXAMPLE

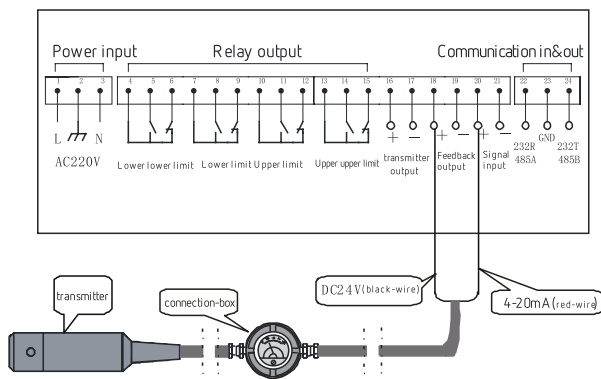


Connecting level transmitter with measure display to build up one measure and control system.

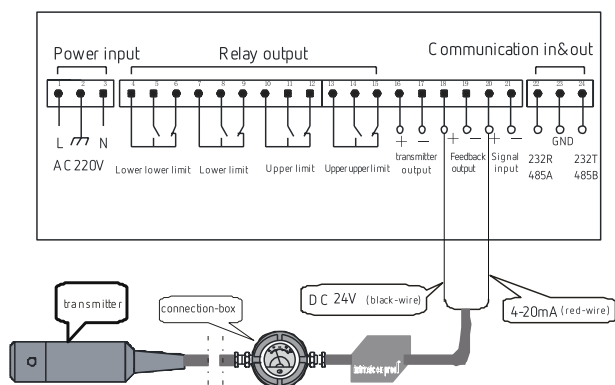


Connecting Ex-proof version transmitter with safe barrier and measure display to build up measure and control system;

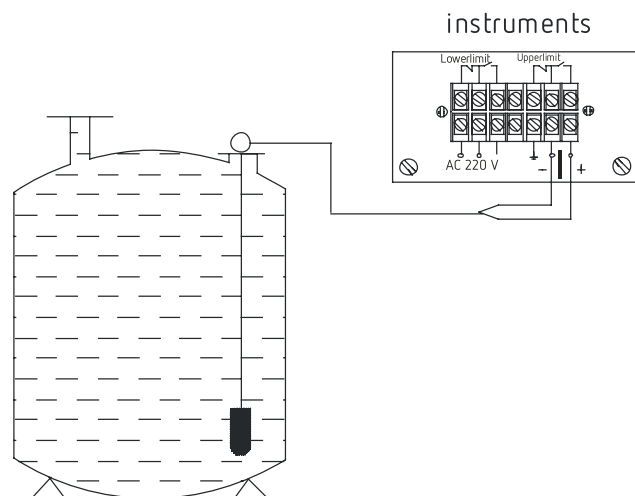

When measure static level in open tank, put level transmitter into tank bottom, and fix transmitter cable and connection box at the open tank entrance.

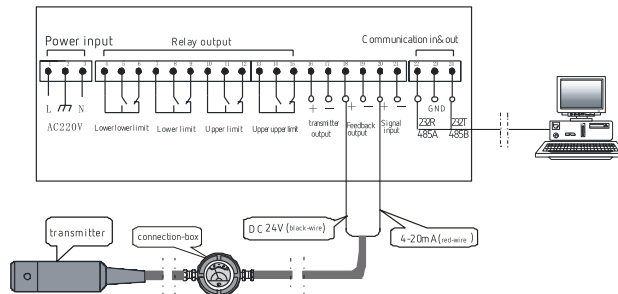


Connecting with MSB9418 measure display to build up one liquid measure and control system with upper and lower limits alarming. Meanwhile, the display could output RS232 or analog signal 1V~5VDC, 0V~5VDC, 4mA~20mADC.

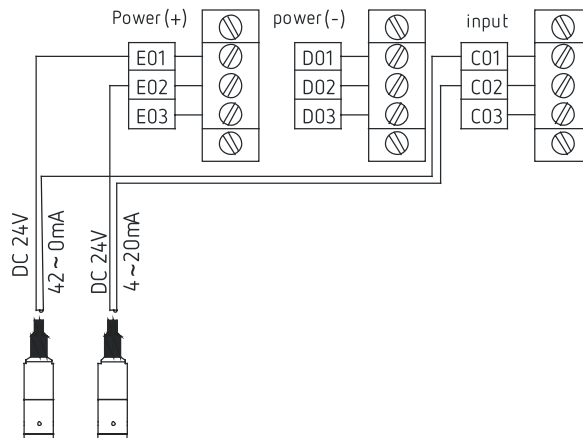

1# transmitter 2# transmitter



Connecting the most two level transmitter with MSB9438 measure display to build up one level difference system with multi-channel display. It can also output 4mA~20mADC analog output and provide upper and lower limit alarming and control.

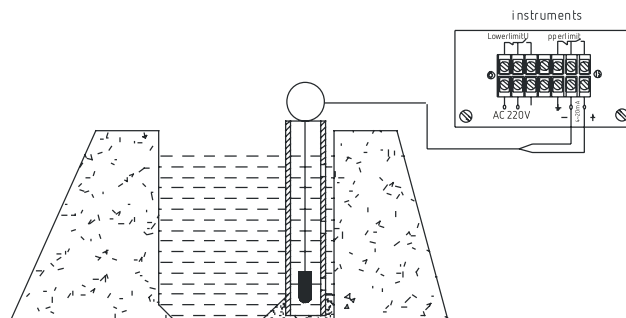



When measuring flow water, insert one steel tube $\Phi 45$ which has little holes $\Phi 5$ at different heights. Make holes opposite to water flowing direction, and let water go into the tube and fix cable and connection box at the entrance of tube.




■ INSTALLATION AT LOCAL PLACE (Unit: mm)

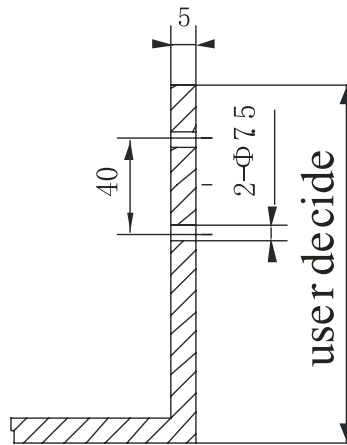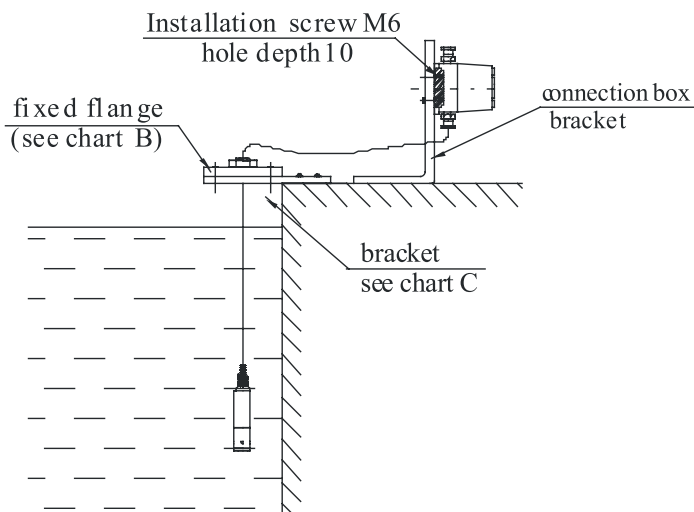

ChartA (user decide)

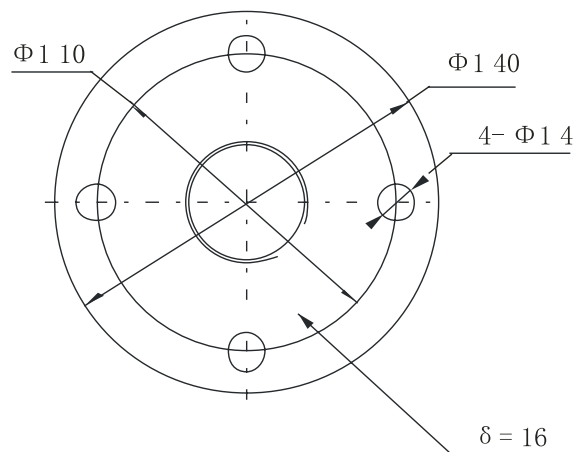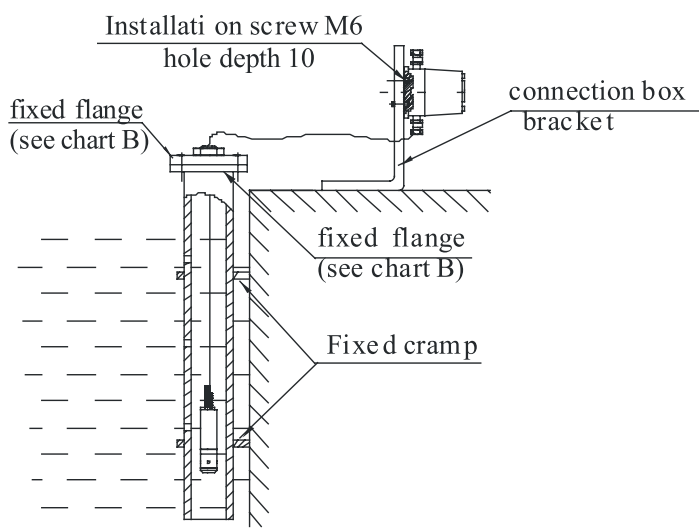

ChartB (Enclosed by factory or user decide)

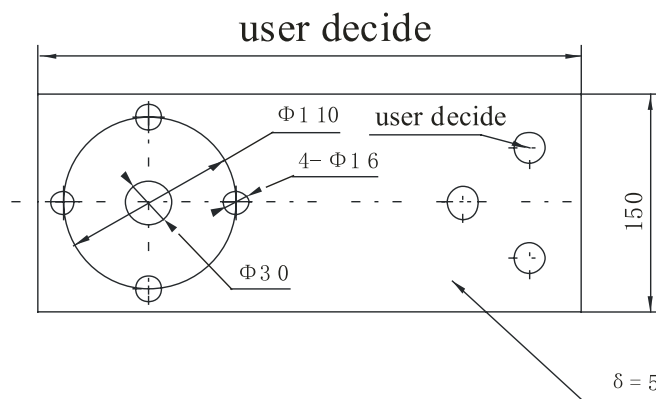

ChartA (user decide)



ORDER GUIDE

MPM416W		Submersible Level Transmitter			
	Range (mH ₂ O)	[0~X mH ₂ O]L	L: cable length, suggested: L-X= (1~2) m		
		Code	Output signal		
		E	4~20mADC		
		F	1~5VDC		
		J	0~5VDC		
		Q	0~10mADC		
		U	0~20mADC		
		V	0~10VDC		
	Code	Construction material			
		Diaphragm	Pressure port	Housing	
	22	SS 316L	SS	SS	
	25	Tantalum	SS	SS	
	Code	Others			
	M ₁	0~100% hand pointer indicator			
i	Intrinsic safe version Exia II CT6				
C ₁	M20×1.5 male, face type seal				
C ₃	G1/2 male				
C ₅	M20×1.5 male, waterline seal				
T	Ship-use				
F ₁	Fixed flange				
MPM416W	[0 ~3mH ₂ O]5	E	22	iC ₁	the whole spec

NOTES

1. Please pay attention if the media is compatible with contacting material, especially pay attention to media density at measuring situation (except water);
2. The cable material is optional, including Polyethylene- (PE), Polyurethane(PUR), PVC and Teflon etc. If there is no special requirement, the default cable material is Polyethylene(PE);
3. If the product is installed in lightning and thunder area, please note "lightning Protection" in the order; we suggest to use lightning protection device to make sure power is grounding safely;
4. If the user has special requirement, please feel free to contact with our company.